

Art. 51

Chiusino circolare apertura ribaltamento

Trappe supérieure ouverture basculante



Boca circular con levantamiento vertical

Round lid with reverse opening



Passaggio utile
Passage utile
Luz util de pasaje
Access

Ø 502

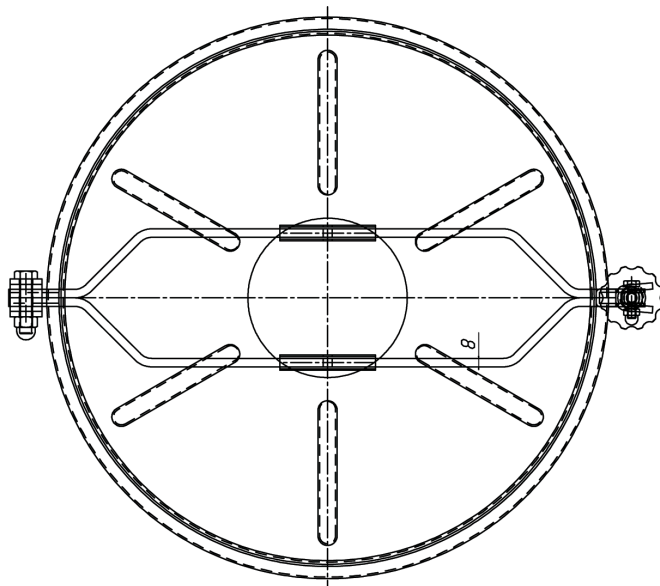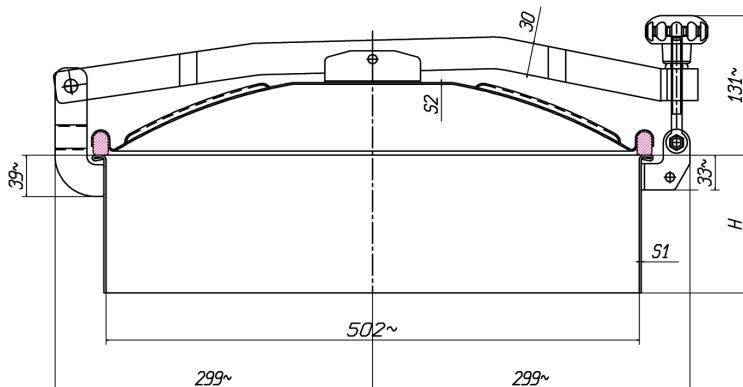

Art.	Ref.	Inox AISI	H m/m	S1 m/m	S2 m/m	P.max Bar
51-4	304	304	60	2,5	1,5	0,02
51-6	316	316	60	2,5	1,5	0,02
51a-4	304	304	90	2,5	1,5	0,02
51a-6	316	316	90	2,5	1,5	0,02
51b-4	304	304	150	2,5	1,5	0,02
51b-6	316	316	150	2,5	1,5	0,02
51c-4	304	304	200	2,5	1,5	0,02
51c-6	316	316	200	2,5	1,5	0,02

H = Altezza telaio in m/m
= Hauteur cadre en m/m
= Altura marco en m/m
= Loom height in m/m

S1 = Spessore telaio in m/m
= Epaisseur cadre en m/m
= Espesor marco en m/m
= Loom thickness in m/m

S2 = Spessore coperchio in m/m
= Epaisseur portillon en m/m
= Espesor portón en m/m
= Cover thickness in m/m