

# Art. 80/1M

Chiusino antiritenzione  
a otto chiusure


*Trappe supérieure  
anti-retention  
à huit fermetures*

*Boca superior tipo  
aséptico con  
ocho cierres*

*Aseptic lid with  
eight closing points*



Passaggio utile  
Passage utile  
Luz util de pasaje    Ø 792 m/m  
Access

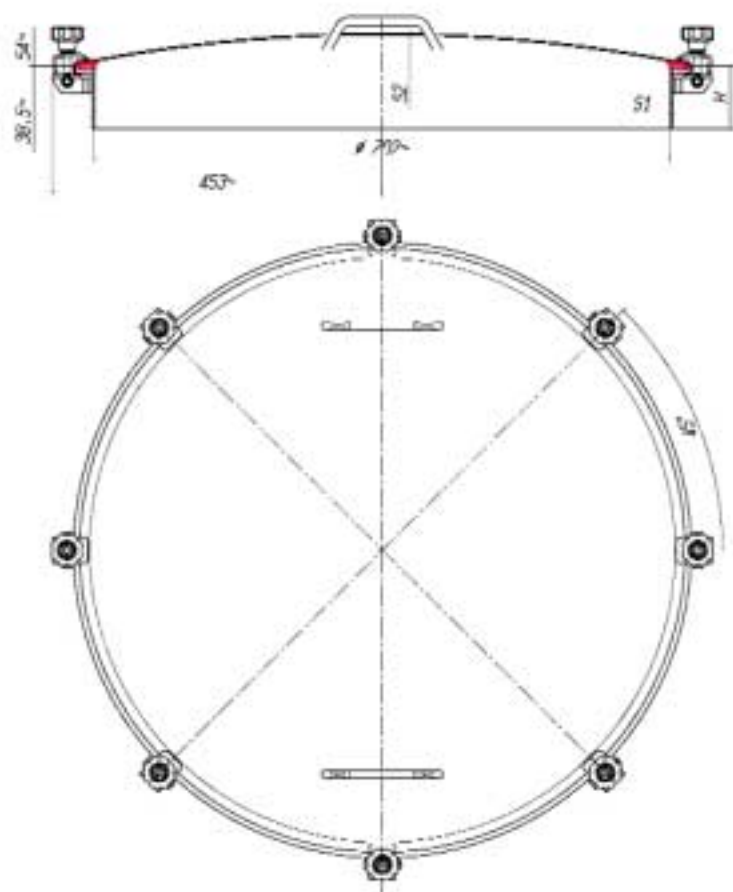

ART. REF.	INOX AISI	H m/m	S1 m/m	S2 m/m	P. MAX BAR
80/1m-4	304	100	3	2	
80/1m-6	316	100	3	2	
80/1m/a-4	304	150	3	2	
80/1m/a-6	316	150	3	2	
80/1m/b-4	304	200	3	2	
80/1m/b-6	316	200	3	2	
80/1m/c-4	304	250	3	2	
80/1m/c-6	316	250	3	2	
80/1m/d-4	304	300	3	2	
80/1m/d-6	316	300	3	2	
80/1m/e-4	304	350	3	2	
80/1m/e-6	316	350	3	2	
80/1m/f-4	304	400	3	2	
80/1m/f-6	316	400	3	2	

H = Altezza telaio in m/m    S1 = Spessore telaio in m/m    S2 = Spessore coperchio in m/m  
 = Hauteur cadre en m/m    = Epaisseur cadre en m/m    = Epaisseur portillon en m/m  
 = Altura marco en m/m    = Espesor marco en m/m    = Espesor portón en m/m  
 = Loom height in m/m    = Loom thickness in m/m    = Cover thickness in m/m